

# HPRC2300 for Canon Eos R5 / R6

## CR5-2300-01



- 1** Canon EOS R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2** Lenses: Diameter Max 90mm x Length Max 220mm
- 3** Cable/Miscellaneous
- 4** LC-E6 Charger for LP-E6 Battery Pack
- 5** LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



### TECHNICAL FEATURES

#### Dimension:

Internal dimension  
304x231x137(mm) - 11.97x9.09x5.39(in)  
External dimension  
335x289x155(mm) - 13.19x11.38x6.10(in)




#### Weight:

1,90kg - 4.19lbs

#### Temperature rating:

Minimum Maximum  
-40°C -40°F +80°C +176°F

### TECHNICAL DRAWING

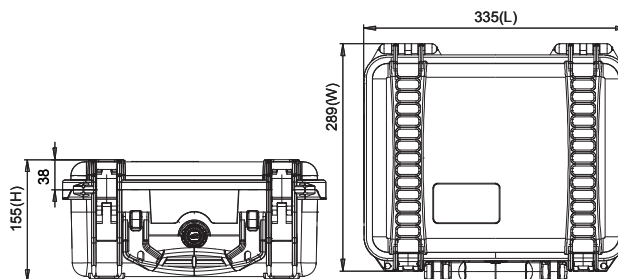

[www.hprc.it](http://www.hprc.it)  
[info@hprc.it](mailto:info@hprc.it)

**Plaber s.r.l. - HPRC cases**  
Via Div Tridentina, 10  
I-36061 Bassano del Grappa  
Vicenza - Italy  
Tel +39 0424 809150

USA office and warehouse:  
HPRC USA  
110 Chestnut Ridge Rd. #314  
Montvale, NJ 07645  
Phone +1(201) 989-3353



**APPROVALS**  
ATA 300  
IP67  
STANAG 4280  
DS 81-41

**TEST**  
DROP  
IMPACT  
HANDLE  
WATERTIGHT INTEGRITY  
UV COLOR AND MATERIAL  
PROTECTION

