


Blackmagic Audio Monitor 12G G3



Blackmagic Audio Monitor 12G G3 is a powerful rack mount audio monitoring solution in a compact 1 rack unit size. This new model features 10G Ethernet SMPTE-2110 IP input to allow monitoring of IP broadcast systems without an external converter. Blackmagic Audio Monitor 12G G3 also includes a large audio meter with accurate ballistics, 12G-SDI input for SD, HD and Ultra HD support, balanced analog XLR, HiFi and AES/EBU inputs and HDMI video output for monitoring SDI and IP video sources.

1 399 €*
 *MSRP (incl. VAT)

Anschlüsse

SDI-Videoeingänge

1

SDI-Videoausgänge

1 loop out.

SDI-Raten

270Mb, 1.5G, 3G, 6G, 12G.

HDMI-2.0-Videoausgänge

1

Multirate-Unterstützung

SDI and HDMI are switchable between standard definition, high definition and ultra high definition.

SDI-Videodurchschleifung

1 x reclocked 10-bit SD-SDI, HD-SDI, 3G-SDI, 6G-SDI and 12G-SDI.

Analoge Audioeingänge

2 x XLR. 2 x RCA HiFi.

Analoge Audioausgänge

1 x 6.5mm headphone socket.

Digitalaudio-Eingänge

1 x XLR.

Eingebauter Lautsprecher

Stereo with 2-way crossover and independent stereo subwoofers.

AES/EBU-Audioeingänge

2 channels balanced 110Ω AES/EBU via XLR.

SDI-Audioeingänge

16 channels embedded in SD, HD and UltraHD 4K.

SDI-Audioausgänge

16 channels embedded audio loop out.

HDMI-Audioausgänge

8 Channels embedded in SD, HD and 4K.

Ethernet

1 x 10Gb/s RJ-45 connector supporting 10/100/1000/10G BASE-T for SMPTE-2110 IP video in, configuration and firmware updates.

Computer-Schnittstelle


USB-C for configuration and firmware updates.

Metering

2 x 27 RGB segment LED VU, PPM or Loudness meters.

Modes

Push button interface allows for input selection, channel selection, independent left and right audio, mute and volume control with scroll wheel.

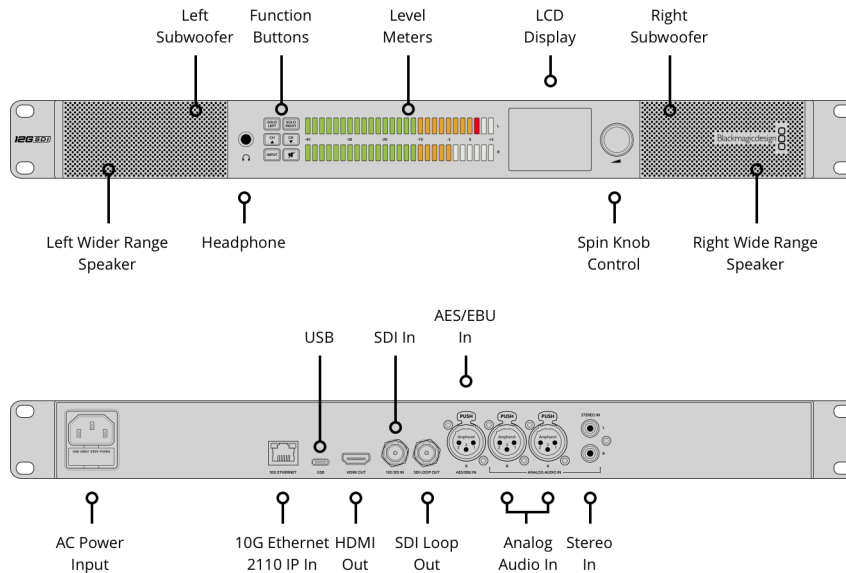

Normen

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p/50; 720p/59,94; 720p/60

1080i/50; 1080i/59,94; 1080i/60

1080p/23,98; 1080p/24; 1080p/25;

1080p/29,97; 1080p/30; 1080p/47,95;

1080p/48; 1080p/50; 1080p/59,94;

1080p/60

1080PsF/23,98; 1080PsF/24; 1080PsF/

25; 1080PsF/29,97; 1080PsF/30

2K Video Standards

2K DCI 23.98p, 2K DCI 24p,

2K DCI 25p, 2K 23.98PsF, 2K 24PsF,

2K 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,

2160p29.97, 2160p30, 2160p50,

2160p59.94, 2160p60

4K Video Standards

4KDCI p23.98, 4KDCI p24, 4KDCI p25,

4KDCI p29.97, 4KDCI p30, 4KDCI p50,

4KDCI p59.94, 4KDCI p60

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE

296M, SMPTE 424M, SMPTE 425M

Level A und B SMPTE 2081-1, SMPTE

2081-10, SMPTE 2082-1, SMPTE

2082-10, SMPTE 2110-20, SMPTE

2110-21, SMPTE 2110-30, SMPTE

2110-40, SMPTE 2084, SMPTE 2108-1.

SDI Auto Switching

Automatically selects between SD, HD, 3G-SDI level A and B, 6G-SDI and 12G-SDI.

Audio Sampling

96 KHz and 24 bit.

Video Sampling

4:2:2 and 4:4:4

Modi der Audiopegelmeter

54 RGB segment LEDs allowing selection of metering with VU, PPM EBU, PPM BBC or Loudness. Includes replaceable level scale.

IP-Videokonformität

SMPTE 2110-20 (Uncompressed Video)

IGMP v2

SMPTE 2110-21 (Traffic Shaping)

Sender: Narrow

Receiver: Narrow, Wide Synchronous, Asynchronous

SMPTE 2110-30 (PCM)

Audio Conformance level: Level C

SMPTE 2110-40 (Ancillary Data)

Full access to entire SMPTE ancillary data stream. Includes RP 188/SMPTE 12M-2, closed captioning and HDR static metadata.

Precision Time Protocol (PTP)

IEEE 1588-2008 (PTP v2)

ST 2059-1

ST 2059-2

NMOS IS-04 Discovery and

Registration

v1.3.2

Peer-to-peer via mDNS/DNS-SD

NMOS IS-05

Connection Management

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01

Receiver capabilities

Codec

Blackmagic IP10 codec used when converting 12G-SDI rates to 10G 2110 IP video.

Steuerung

Built-in Control Panel

2.2 inch display for viewing video input, video standard and selected audio input.

Software

Internal Software Upgrade

Via USB connection and Ethernet

Betriebssysteme



Mac 10.13 High Sierra,
Mac 10.14 Mojave oder höher



Windows 8.1 und 10

Bildschirme

Display Element

2.2 inch diagonal color LCD.

Display Resolution

320 x 240.

Input Display

SDI video, format, audio type
and audio channels.

Strombedarf

Power Supply

1 x Internal 100 - 240V AC.

Power Usage

55 Watts

Physische Installation

1 rack unit.

Physische Spezifikationen



Umgebung

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

Im Lieferumfang enthalten

Blackmagic Audio Monitor 12G G3
PPM and Loudness Scale Stickers
Startermappe mit QR-Code zum Download der Software

Garantie

12 Month Limited Manufacturer's Warranty.

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2024. Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer. Unverbindliche Preisempfehlungen inkl. MwSt. zzgl. Versand- und Zustellungskosten. Diese Website nutzt Remarketing-Dienste. Besuchern unserer Website werden unsere Inhalte auch auf Fremdanbieter-Websites angezeigt. Sie können sich jederzeit abmelden, indem Sie Ihre Cookie-Einstellungen ändern. [Datenschutzerklärung](#)

Zugelassene Blackmagic Design Reseller