



Fit Optional Carry Handle (S2051-1063)

Fit the handle to Ace MkII 75/2 AL and 75/2 CF Tripods

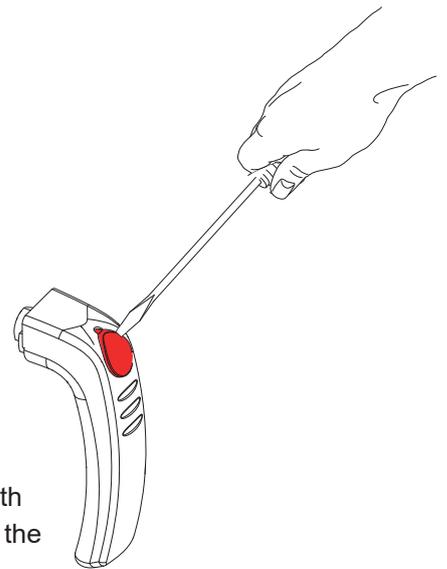

Exploded view showing the pre-assembled components fitted in the handle.

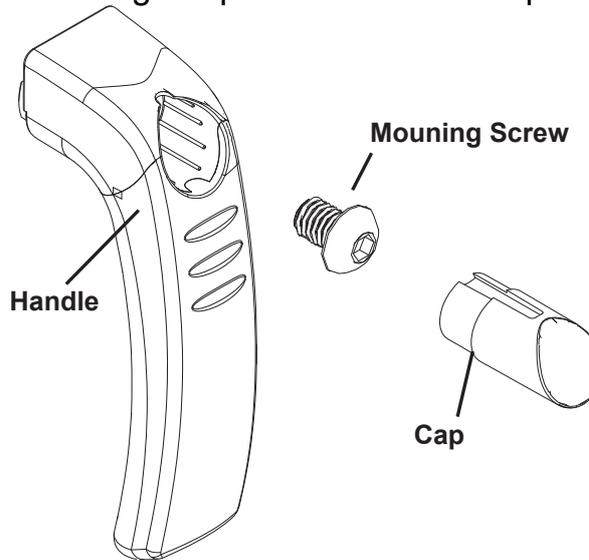

Before attaching the handle.

Using a fingernail or small screwdriver, lever the cap away from the top of the handle to reveal the (pre installed) mounting screw and spacer.

- Insert the supplied Hex key into the mounting screw in the handle, align with the bolt hole and tighten clockwise, ensure the handle is secure. Re-insert the rubber sleeve.
- To remove the handle, invert the tripod and reverse steps a.



Ensure the carry handle is attached securely. Always check before use and tighten the nut and bolt if required.



Always remove the camera before transporting.



Scan for Instructional video

