




SWIFT 5.5 " Wireless Monitor Kit

Model: 7109+3109

- 5.5" touch-screen monitors with built-in wireless video transmission modules.
- Including a wireless TX monitor (on-camera monitor) and a wireless RX monitor.
- Up to 800ft wireless transmission.
- Ultra-low Latency ≤ 70 ms.
- Up to 1080p60Hz.
- Multiple RF channels are available.
- Support HDMI input and output, audio output.
- Support HDR display, 3D LUT import, professional video analysis functions
- Support 500 nits of brightness.
- Support Dual NP-F battery slots and battery switching.
- Lightweight and easy installation.
- Support power for camera.



Wireless



250+



Ultra-low
Latency



5.5 "
Touch Screen



HDMI



Dual Battery Slots




Custom
3D LUT



Power for
Camera



FULL HD

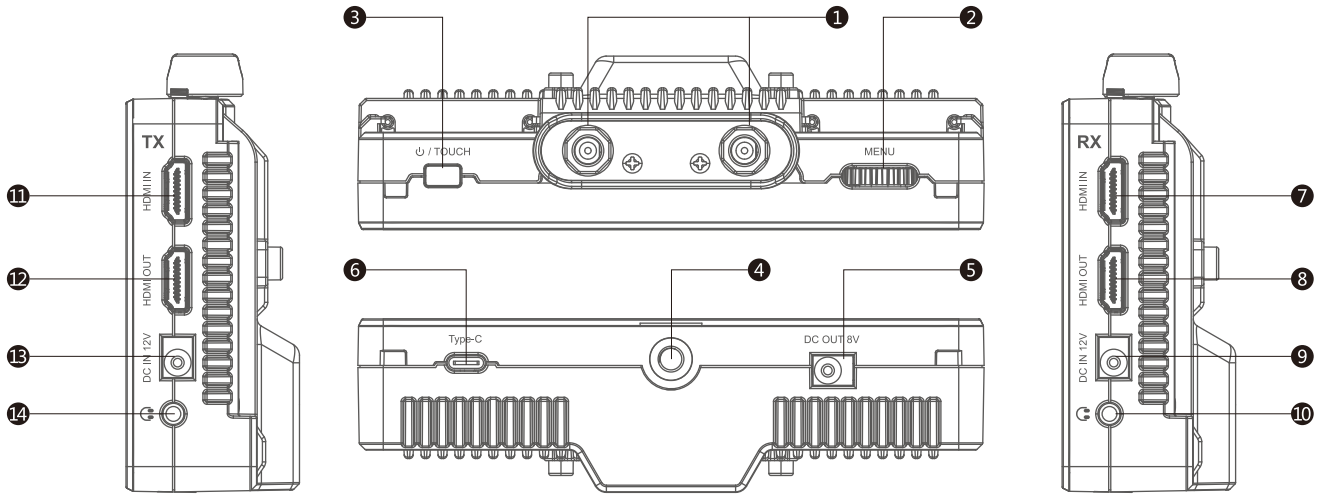

- ① Antenna port ② Menu ③ Power & Touch off Switch ④ 1/4-20 thread point ⑤ DC OUT 8V ⑥ Type-C ⑦ HDMI IN
 ⑧ HDMI OUT ⑨ DC IN 12V ⑩ Audio output ⑪ HDMI IN ⑫ HDMI OUT ⑬ DC IN 12V ⑭ Audio output

ITEM	TX:7109	RX:3109
Panel Size	5.5" touch screen	
Resolution	1920 × 1080 pixels	
Frequency	5.1-5.9(GHz)	
Audio Format	PCM	
System Latency	70ms	
Transmission Distance	250m/800ft (open environment)	
Antenna Mode	2dBi * 2	
Dot Pitch	0.0639 (H) × 0.0213 (W) mm	
Pixel Density	400PPI	
Aspect Ratio	16:9	
Brightness	500cd/m2	
Contrast	1000:1	
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)	
Backlight	LED	
Adjustable Backlight	Yes	
Input	HDMI V1.4	
Output	HDMI V1.4, 3.5mm stereo headphone jack	
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner)	
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)	
HDMI Input/ Output Support Format	Wireless Transmission Opening 480P,576I,576P,720P60/59.94/50,1080I50/59.94/601080p23.98/24/25/29.97/30/50/59.97/60 Wireless Transmission Closing 480P,576I,576P,720P60/59.94/50,1080I50/59.94/601080p23.98/24/25/29.97/30/50/59.97/604K UHD 3840×2160p (30/29.97/25/24/23.98Hz) DCI 4K 4096×2160p (24Hz)	
Power Input Voltage	7-24V	
Power Consumption	≤18W	
Unit Size (mm)	148Lx103.5Hx41W (mm)	
Unit Weight	370g (TX) , 370g (RX)	
Mount Pointone	1/4-20 thread point on bottom	
Temperature	Working Temperature-20°C~55°C, Storage Temperature-30°C~65°C	