


Interface Introduction

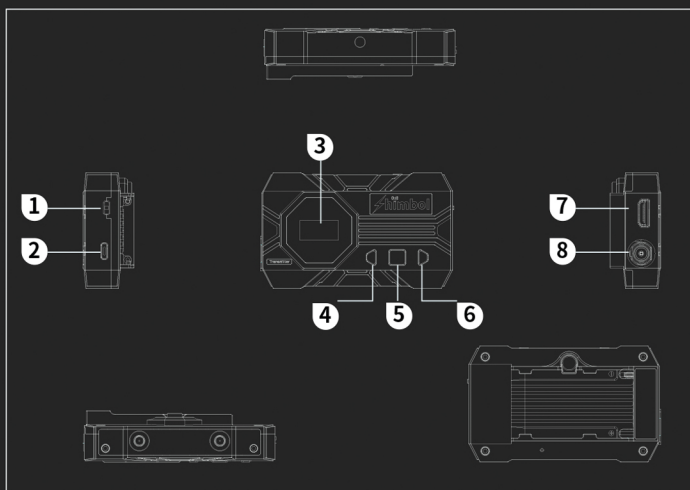

1 Power switch

5 Menu Button

2 USB Type-c Port (Power & UVC Live streaming (RX))

6 Right Button

3 OLED Screen

7 HDMI Input(TX)/ Output(RX)

4 Left Button

8 SDI Input(TX)/ Output(RX)

Parameter

	Transmitter	Receiver
Interfaces	HDMI input/SDI input	HDMI output/SDI output/TYPE-C output (UVC)
Power Supply Way	5V-2A DC/NP-F Battery	
Power Consumption	<4W	<4W
HDMI Input Format	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output Format	/	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
SDI Input Format	720P@50/60Hz 1080I@50/59.94/60Hz 1080P@23.98/24/25/29.97/30 50/59.94/60Hz 1080PSF23.98/24/25/29.97/30Hz	/
SDI Output Format	/	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
TYPE-C Output(UVC)	/	1080P@24/25/30/50/60Hz
Audio Sample Rate	48KHz	
Weight	168g	168g
Size	110*66.5*29.5mm	110*66.5*29.5mm
Frequency	5.1G-5.8G	5.1G-5.8G
Transmission Power	17dBm	/
Latency	Typical 80ms, interference environment 120ms	
Receiving Sensitivity	-80dBm	
Distance	1 TX to 1 RX 300m (LOS)	
	1 TX to 2 RX 100m (LOS)	