


Interfaces

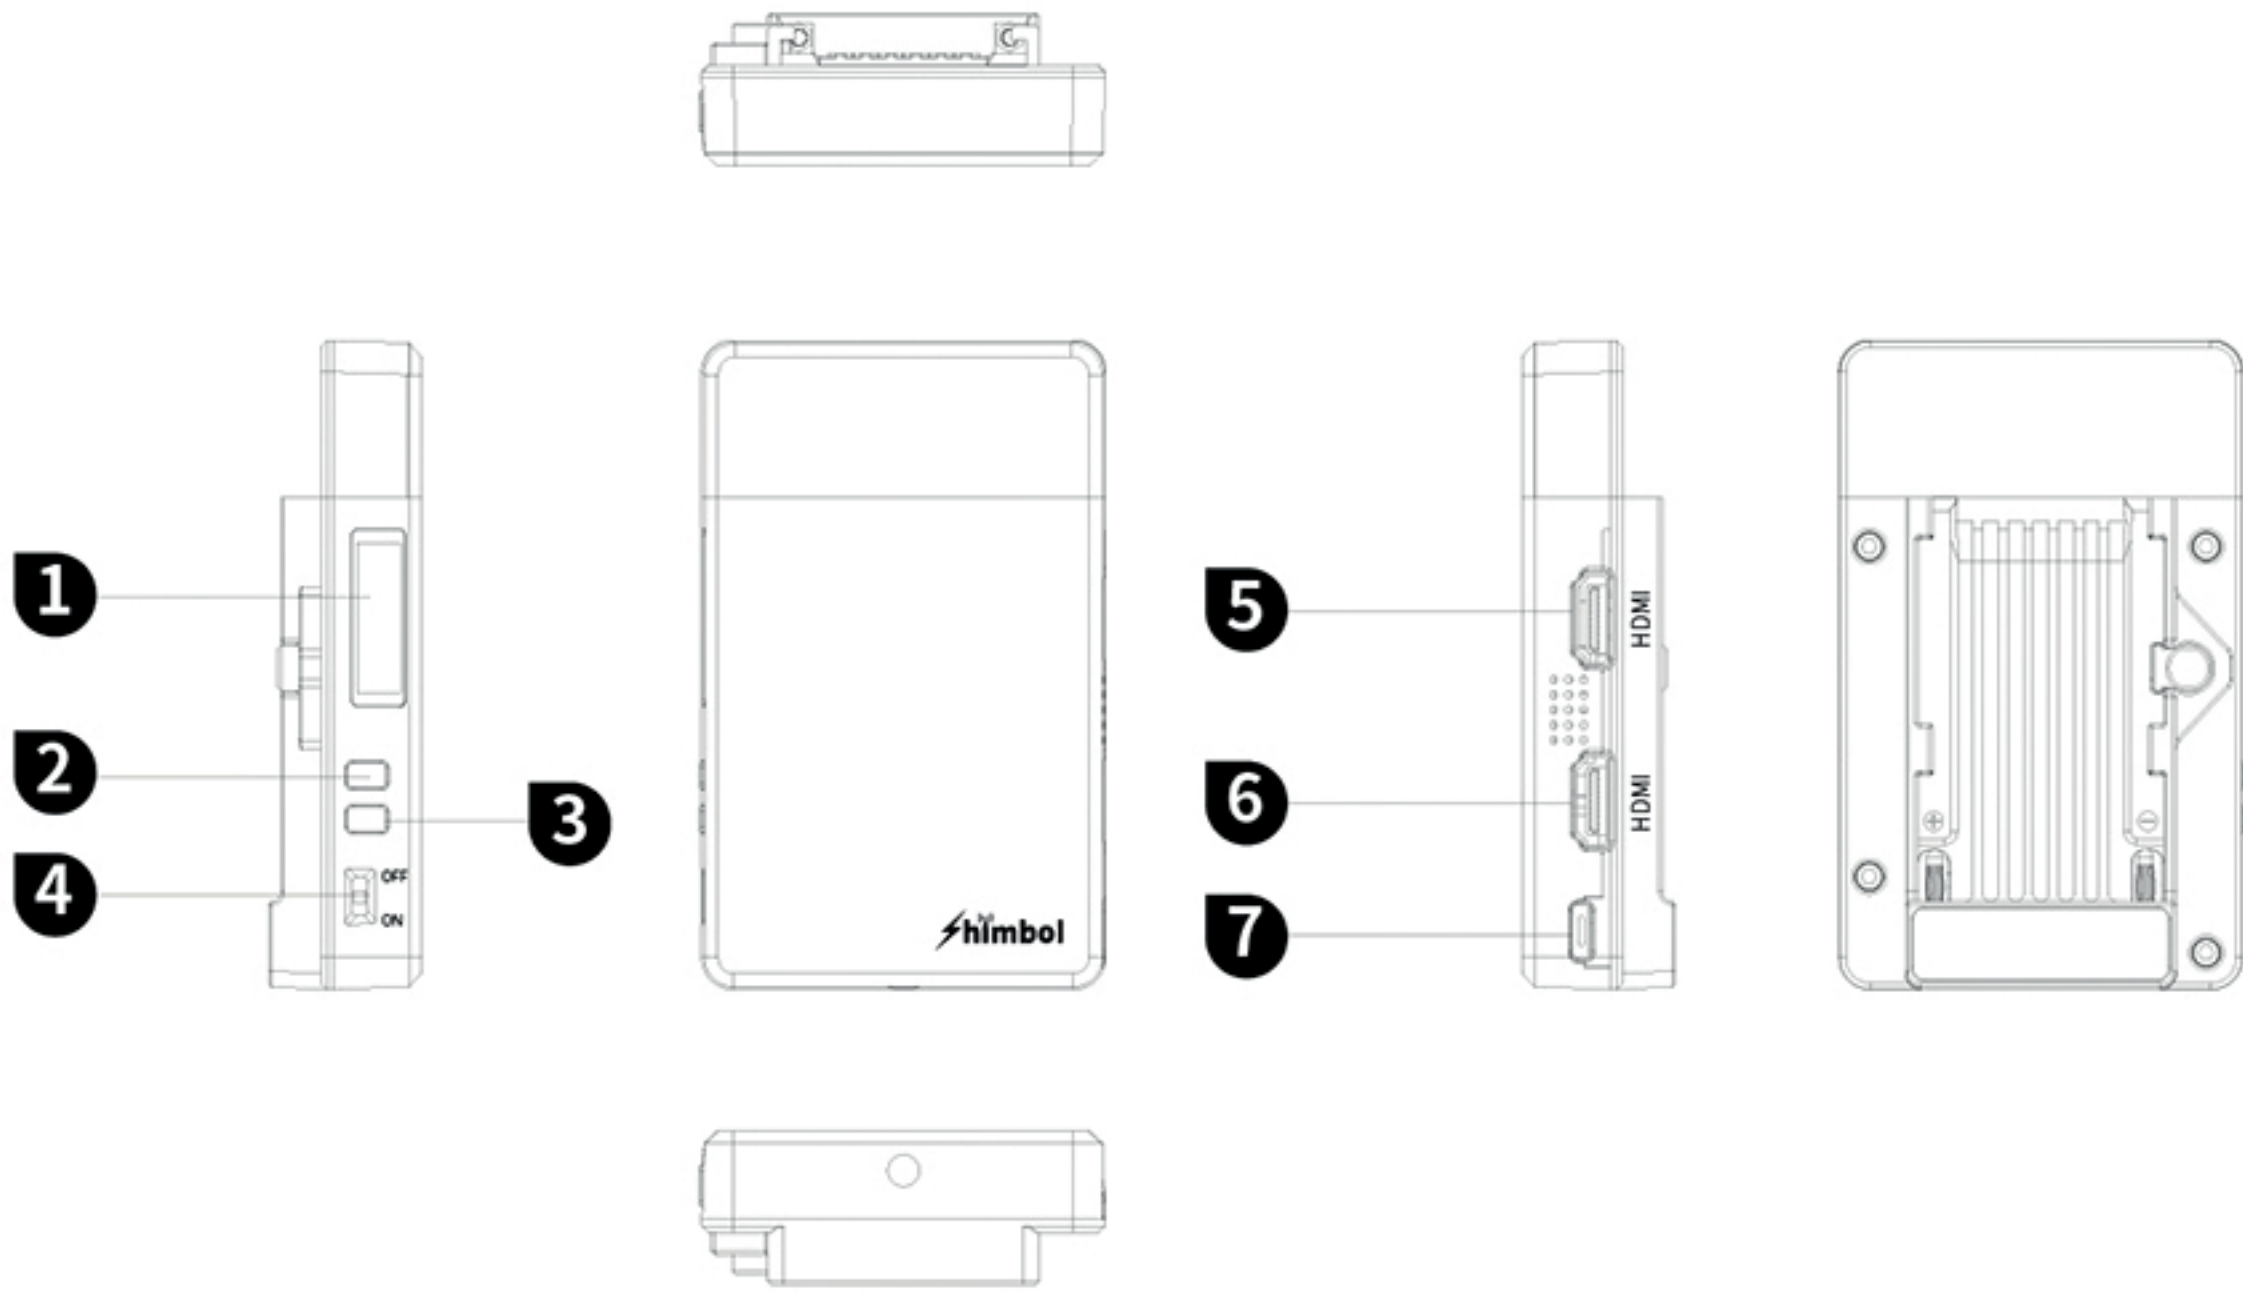

1 OLED Display screen

2 Direction button

3 Menu button

4 Power switch

5 HDMI Output(TX/RX)

6 HDMI Input(TX)/ Output(RX)

7 USB-C Port

Parameters

	Transmitter	Receiver
Interface	HDMI Input/HDMI Output	HDMI Output*2
Powered By	5V Type-C/NP-F Battery	5V Type-C/NP-F Battery
Power consumption	<3W	<2.5W
HDMI Input	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
Weight	120g	120g
Size	103*63.5*16mm	103*63.5*16mm
Transmission frequency band	5GHz	
Transmit power	17dBm	
Transmission delay	80ms, Noisy RF environment 120ms typical	
Receiving sensitivity	-80dBm	