




Wireless Video Transmission System ZOlink series

Item Model: ZO600S

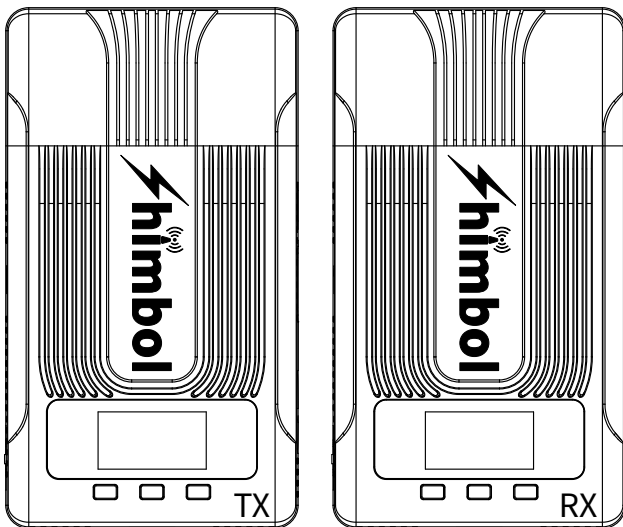

Manual

Shenzhen ZO Video Technology Co., Ltd.

01/Features



Transmit Range



Built-in antenna



Latency



Ultra-low-power



Multiple monitoring




Multiple power supply


02/Packing list

- 1 Transmitter*1
- 2 Receiver*1
- 3 User Manual*1
- 4 Type-c power cable*1

03/How to use

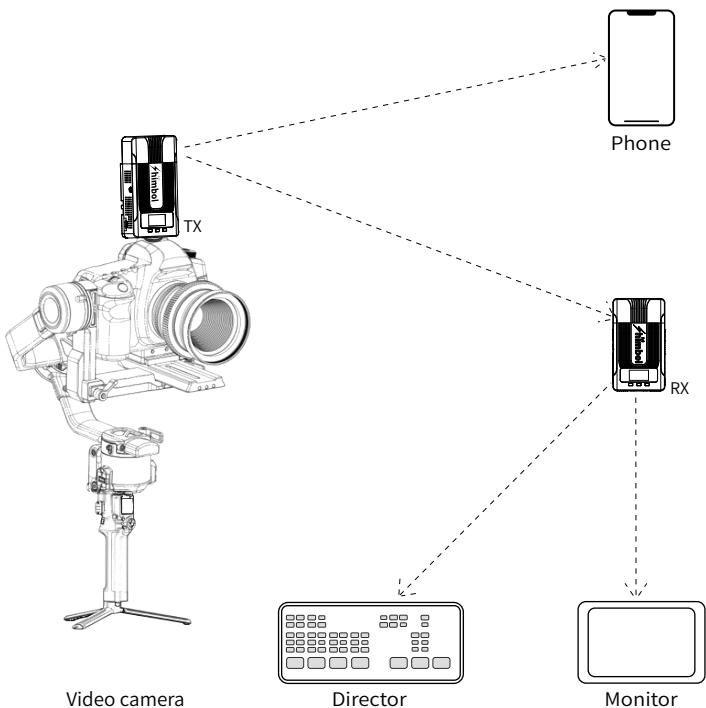

04/Product Description

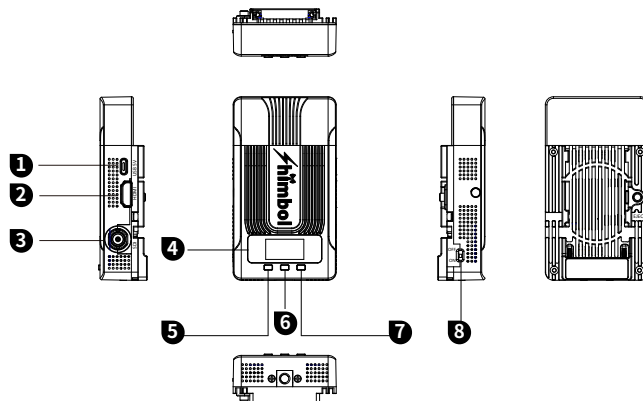

- 1** USB-C Port
- 2** HDMI Input(TX)/ Output(RX)
- 3** SDI Input(TX)/ Output(RX)
- 4** OLED Display screen
- 5** Direction button
- 6** Menu button
- 7** Direction button
- 8** Power switch

- A** Long press **5** Key for 3 seconds to enter the upgrade menu.
- B** Long press **6** Key for 3 seconds to enter into System Settings menu.
- C** Connecting to TX Device - Long press **7** Key for 3 seconds to show a connection QR code. Open mobile App to scan the Connection QR code.

05/Technical Parameters



	Transmitter	Receiver
Interface	HDMI Input/SDI Input	HDMI Output/SDI Output
Powered By	5V DC/NP-F Battery	5V DC/NP-F Battery
Power consumption	<5W	<3W
HDMI Input	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output	/	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
SDI Input	720P@50/60Hz 1080I@50/59.94/60Hz 1080P@23.98/24/25/29.97/30 50/59.94/60Hz 1080PSF23.98/24/25/29.97/30Hz	
SDI Output		720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
Weight	160g	160g
Size	113*63.5*20.5mm	113*63.5*20.5mm
Transmission frequency band	5GHz	5GHz
Transmittion power	21dBmMAX	/
Transmission delay	80ms, Noisy RF environment 120ms typical	
Receiving sensitivity	/	-80dBm

Download “shimbol” APP on Apple App Store.



W52 Band :5GHz product for indoor use only

Tel:+86 0755-21004986

URL:www.zeroone-video.com

Address:2C, 2nd Floor, Building 6, Longbi Industrial Park
No.27 Dafa Road, Bantian Street, Longgang District, Shenzhen
Shenzhen ZO Video Technology Co., Ltd.