

BASIC PARAMETERS

Size:	8"
Dimension:	208mm*133.7mm*50.5mm
Viewing Angle:	178°H/178°V
Brightness:	1100nit
Resolution:	1920X1200
Contrast Ratio:	1000:1
Weight:	675g
Color:	10bit(8+2 FRC)
Material:	Aluminum alloy
Input Voltage:	DC 7~20V
Max Power:	20W
Video Signal Input:	3G SDI、4K60p HDMI
Video Signal Output:	3G SDI、HDMI
Headphone:	3-section 3.5mm headphone jack
Menu Language:	简体中文/繁体中文/English/日本語/Русский /Français/español
Signal Conversion:	HDMI/SDI Conversion
Support Battery Model:	NP-F550/NP-F750/NP-F970
USB-A:	Upgrade Firmware / Load LUT
Fan:	Yes
Operating System:	Portkeys OS

SIGNAL SPECIFICATIONS

Supported input/output resolution and frame rate

4K HDMI input Signal

4096×2160p@50Hz,59.96Hz,60Hz

4096×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz

3840×2160p@50Hz,59.96Hz,60Hz

3840×2160p@23.98Hz,24Hz,25Hz,29.97Hz,30Hz

HDMI input/Output Signal

1920×1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz

1920×1080psf@23.97Hz,24Hz,25Hz,29.97Hz,30Hz

1920×1080i@50Hz,59.94Hz,60Hz

1280×720p@50Hz,59.94Hz,60Hz

Supported input/output resolution and frame rate

SDI Signal

1920×1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz YUV422

1920×1080psf@23.98Hz,24Hz,25Hz,29.97Hz,30Hz YUV444/YUV422/RGB444

1920×1080i@50Hz,59.94Hz,60Hz YUV444/YUV422

1280×720p@50Hz,59.94Hz,60Hz YUV444/YUV422


PRODUCT INFORMATION

208mm


133.7mm

8"

50.5mm

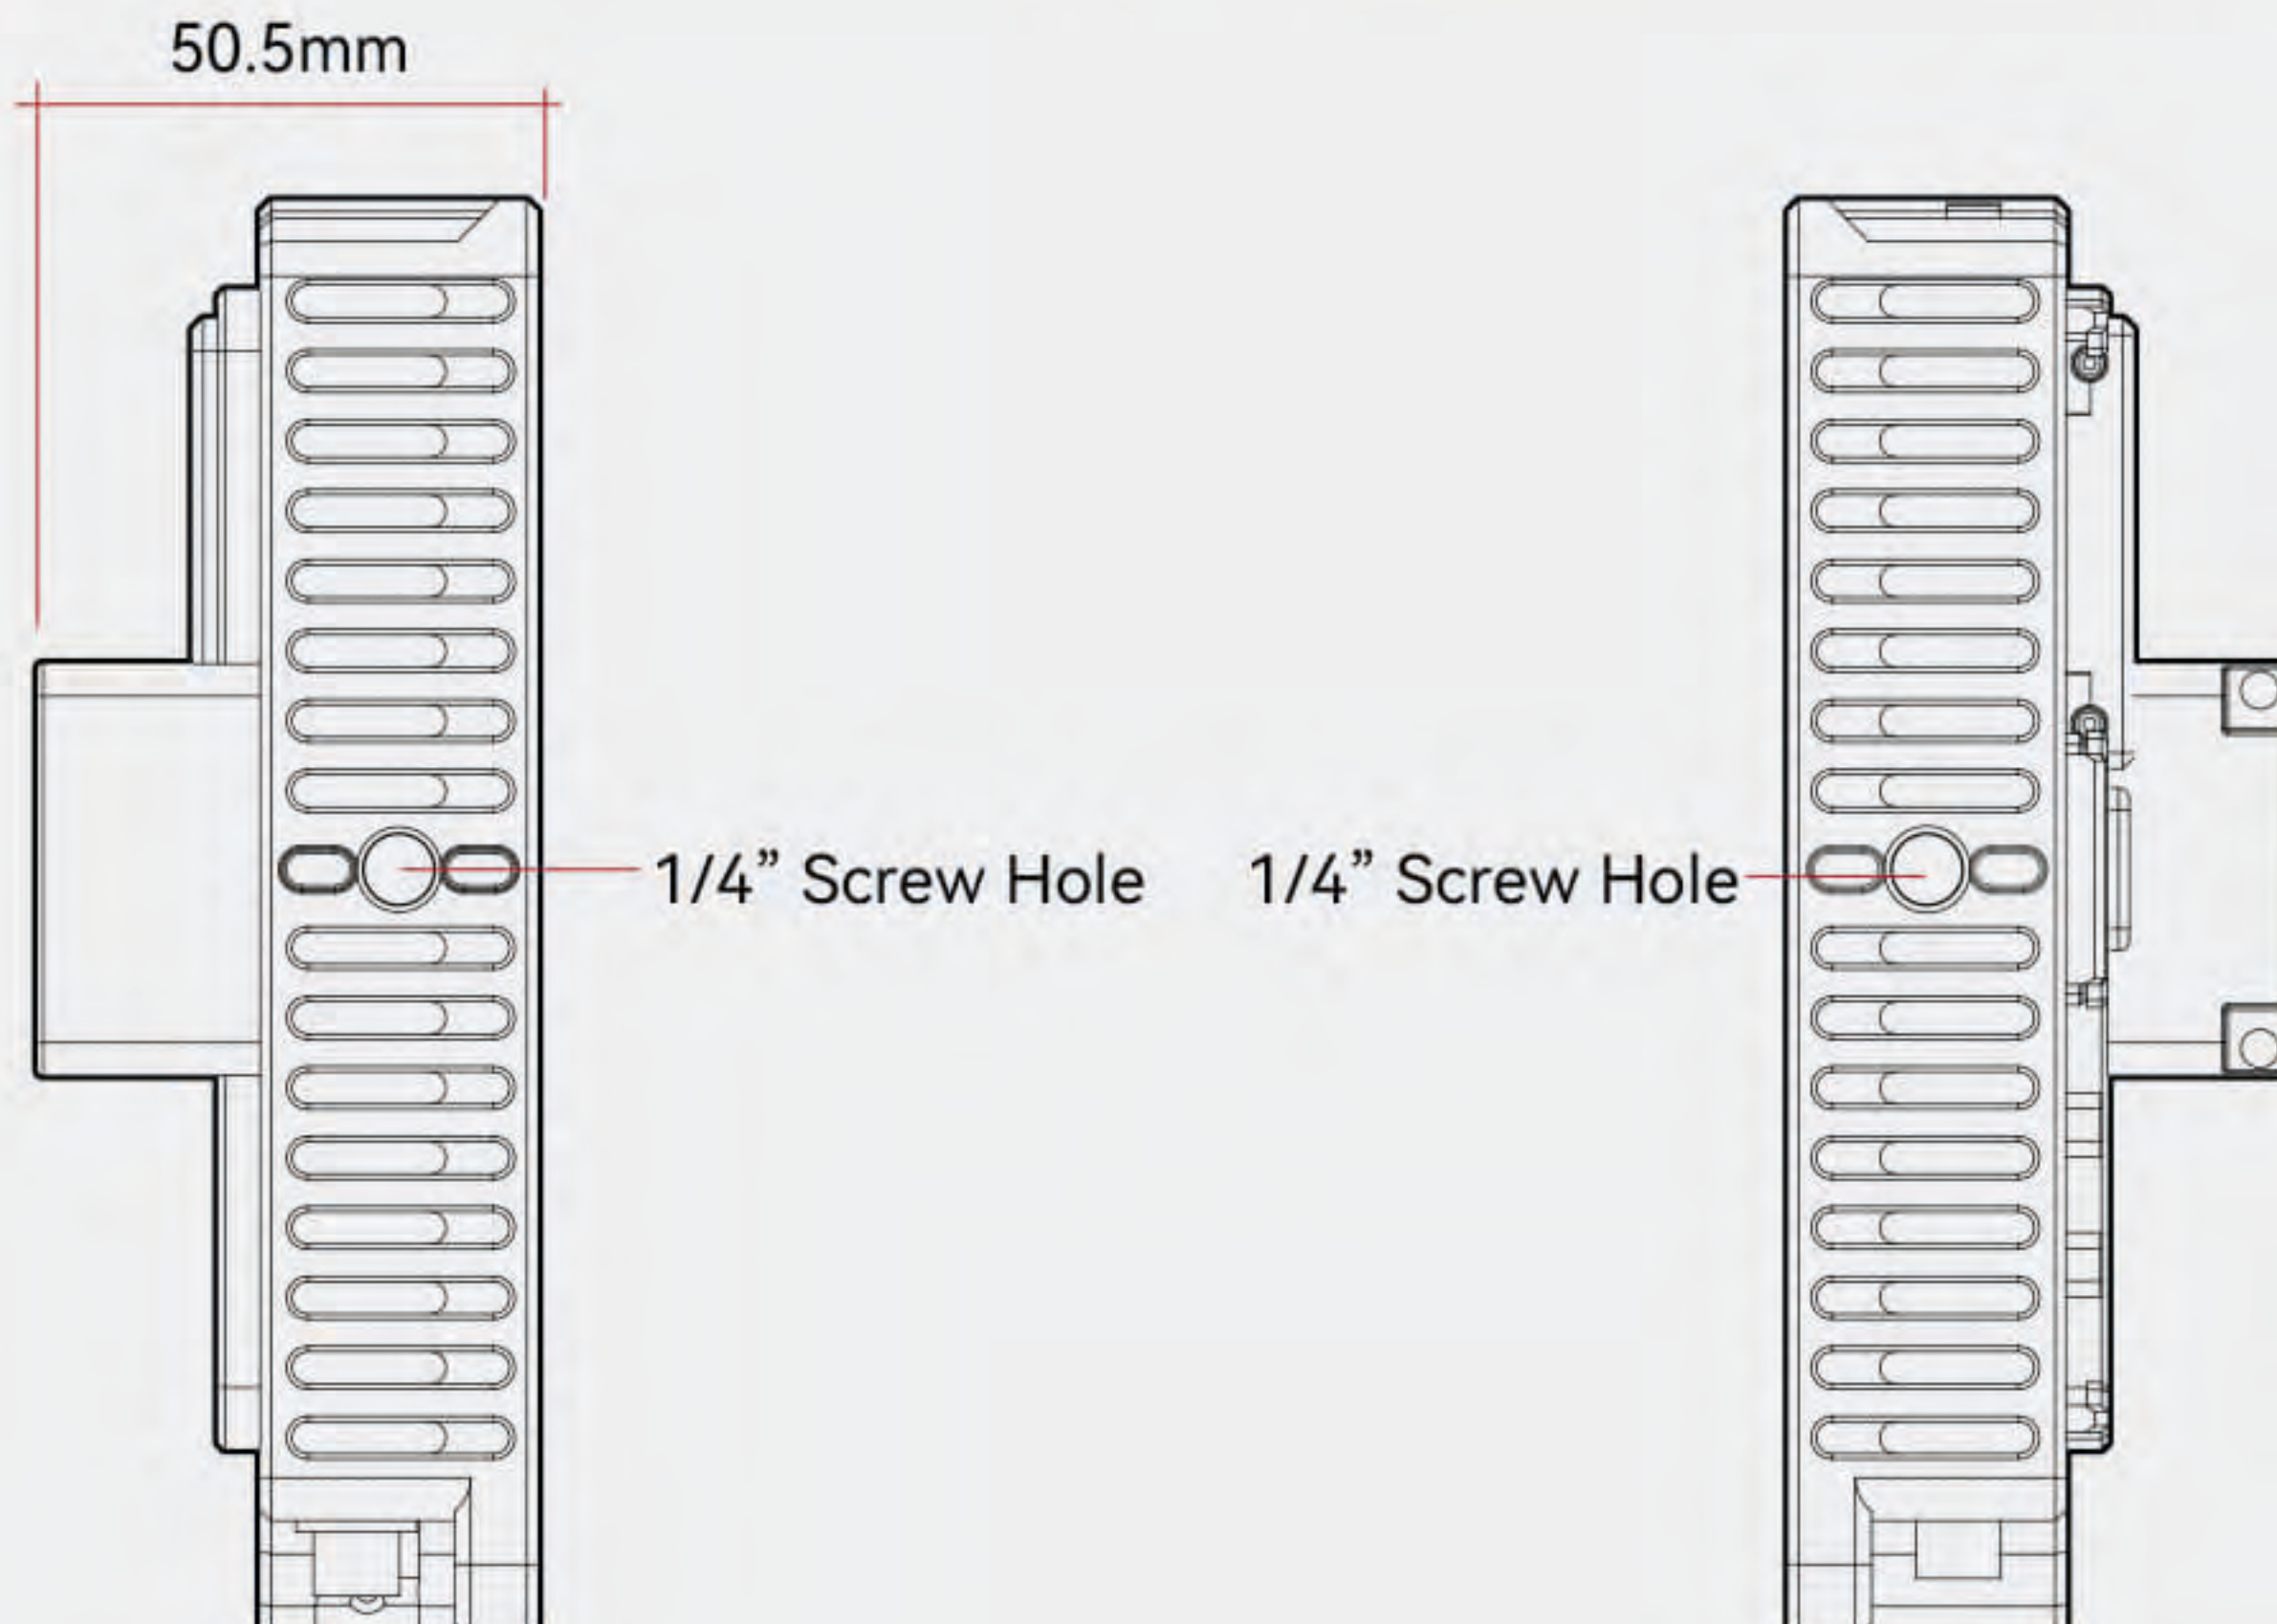

Custom Function (F key)

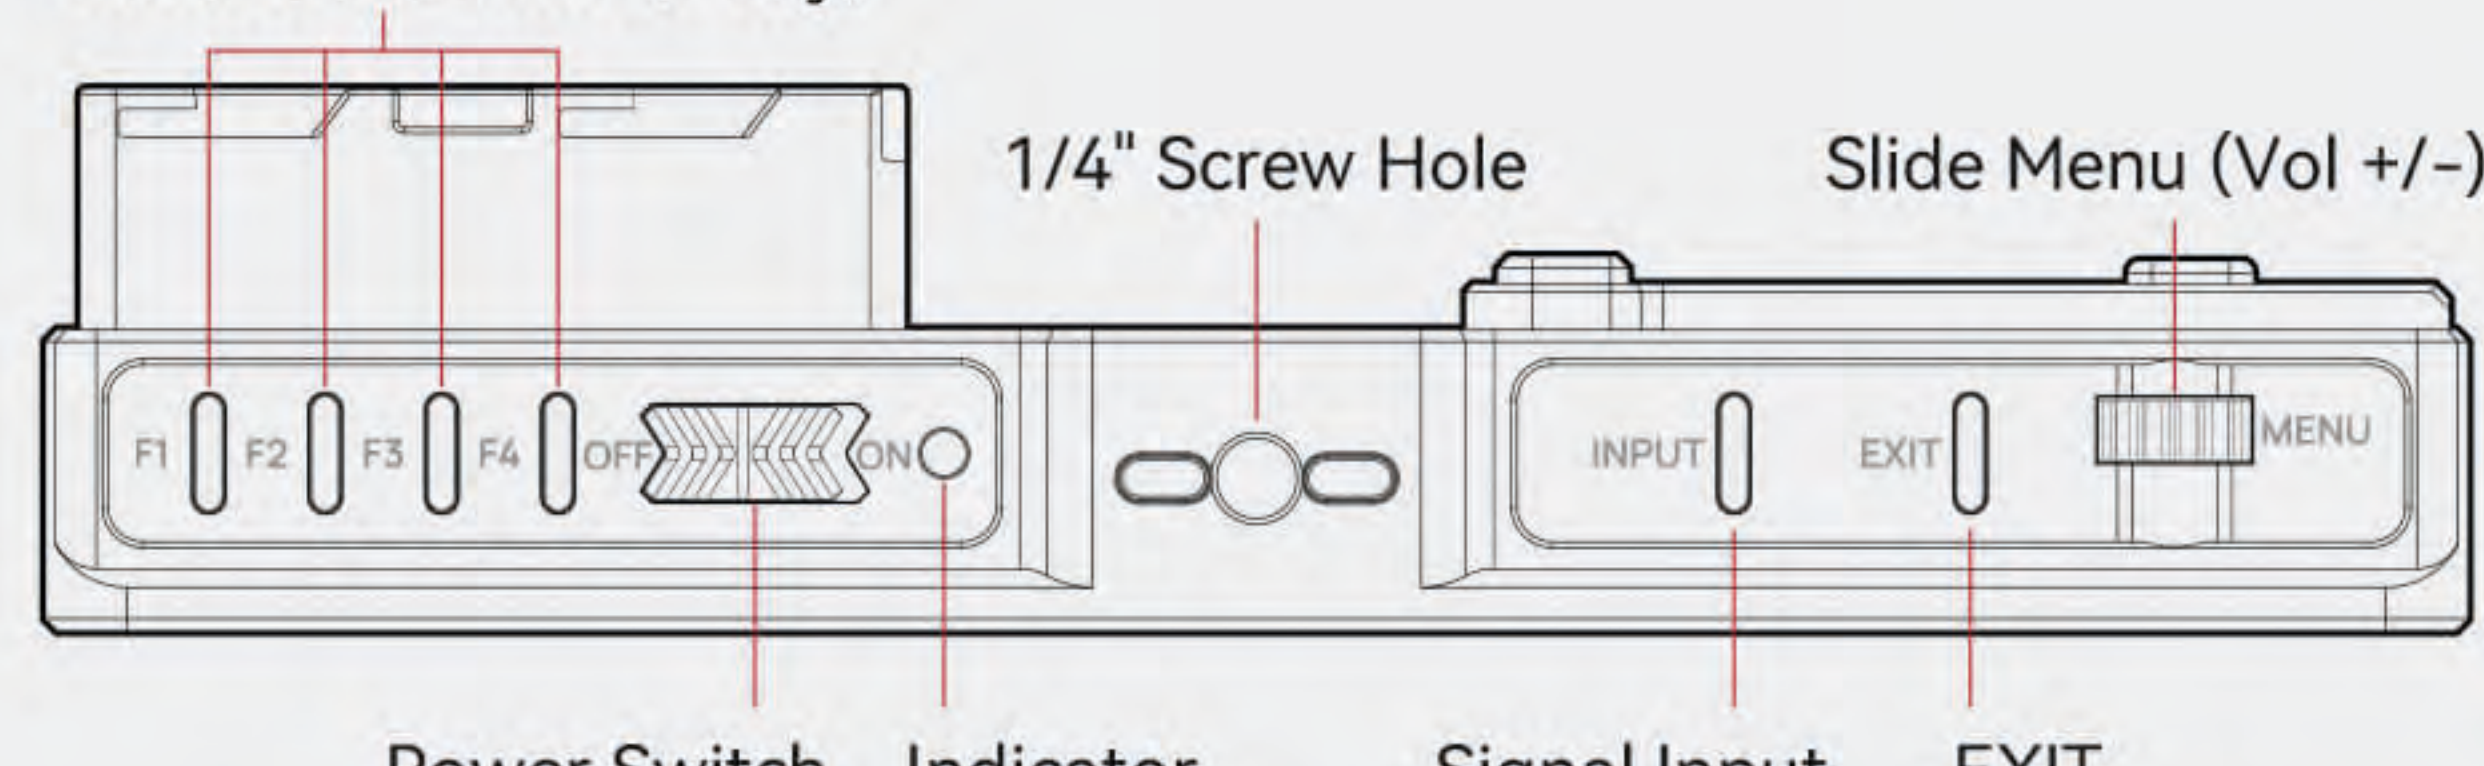

7~20V

Power Interface

SDI Output

SDI Input

1/4" Screw Hole


HDMI Input

HDMI Output

Audio Output

USB-A

100X100mm VESA Interface

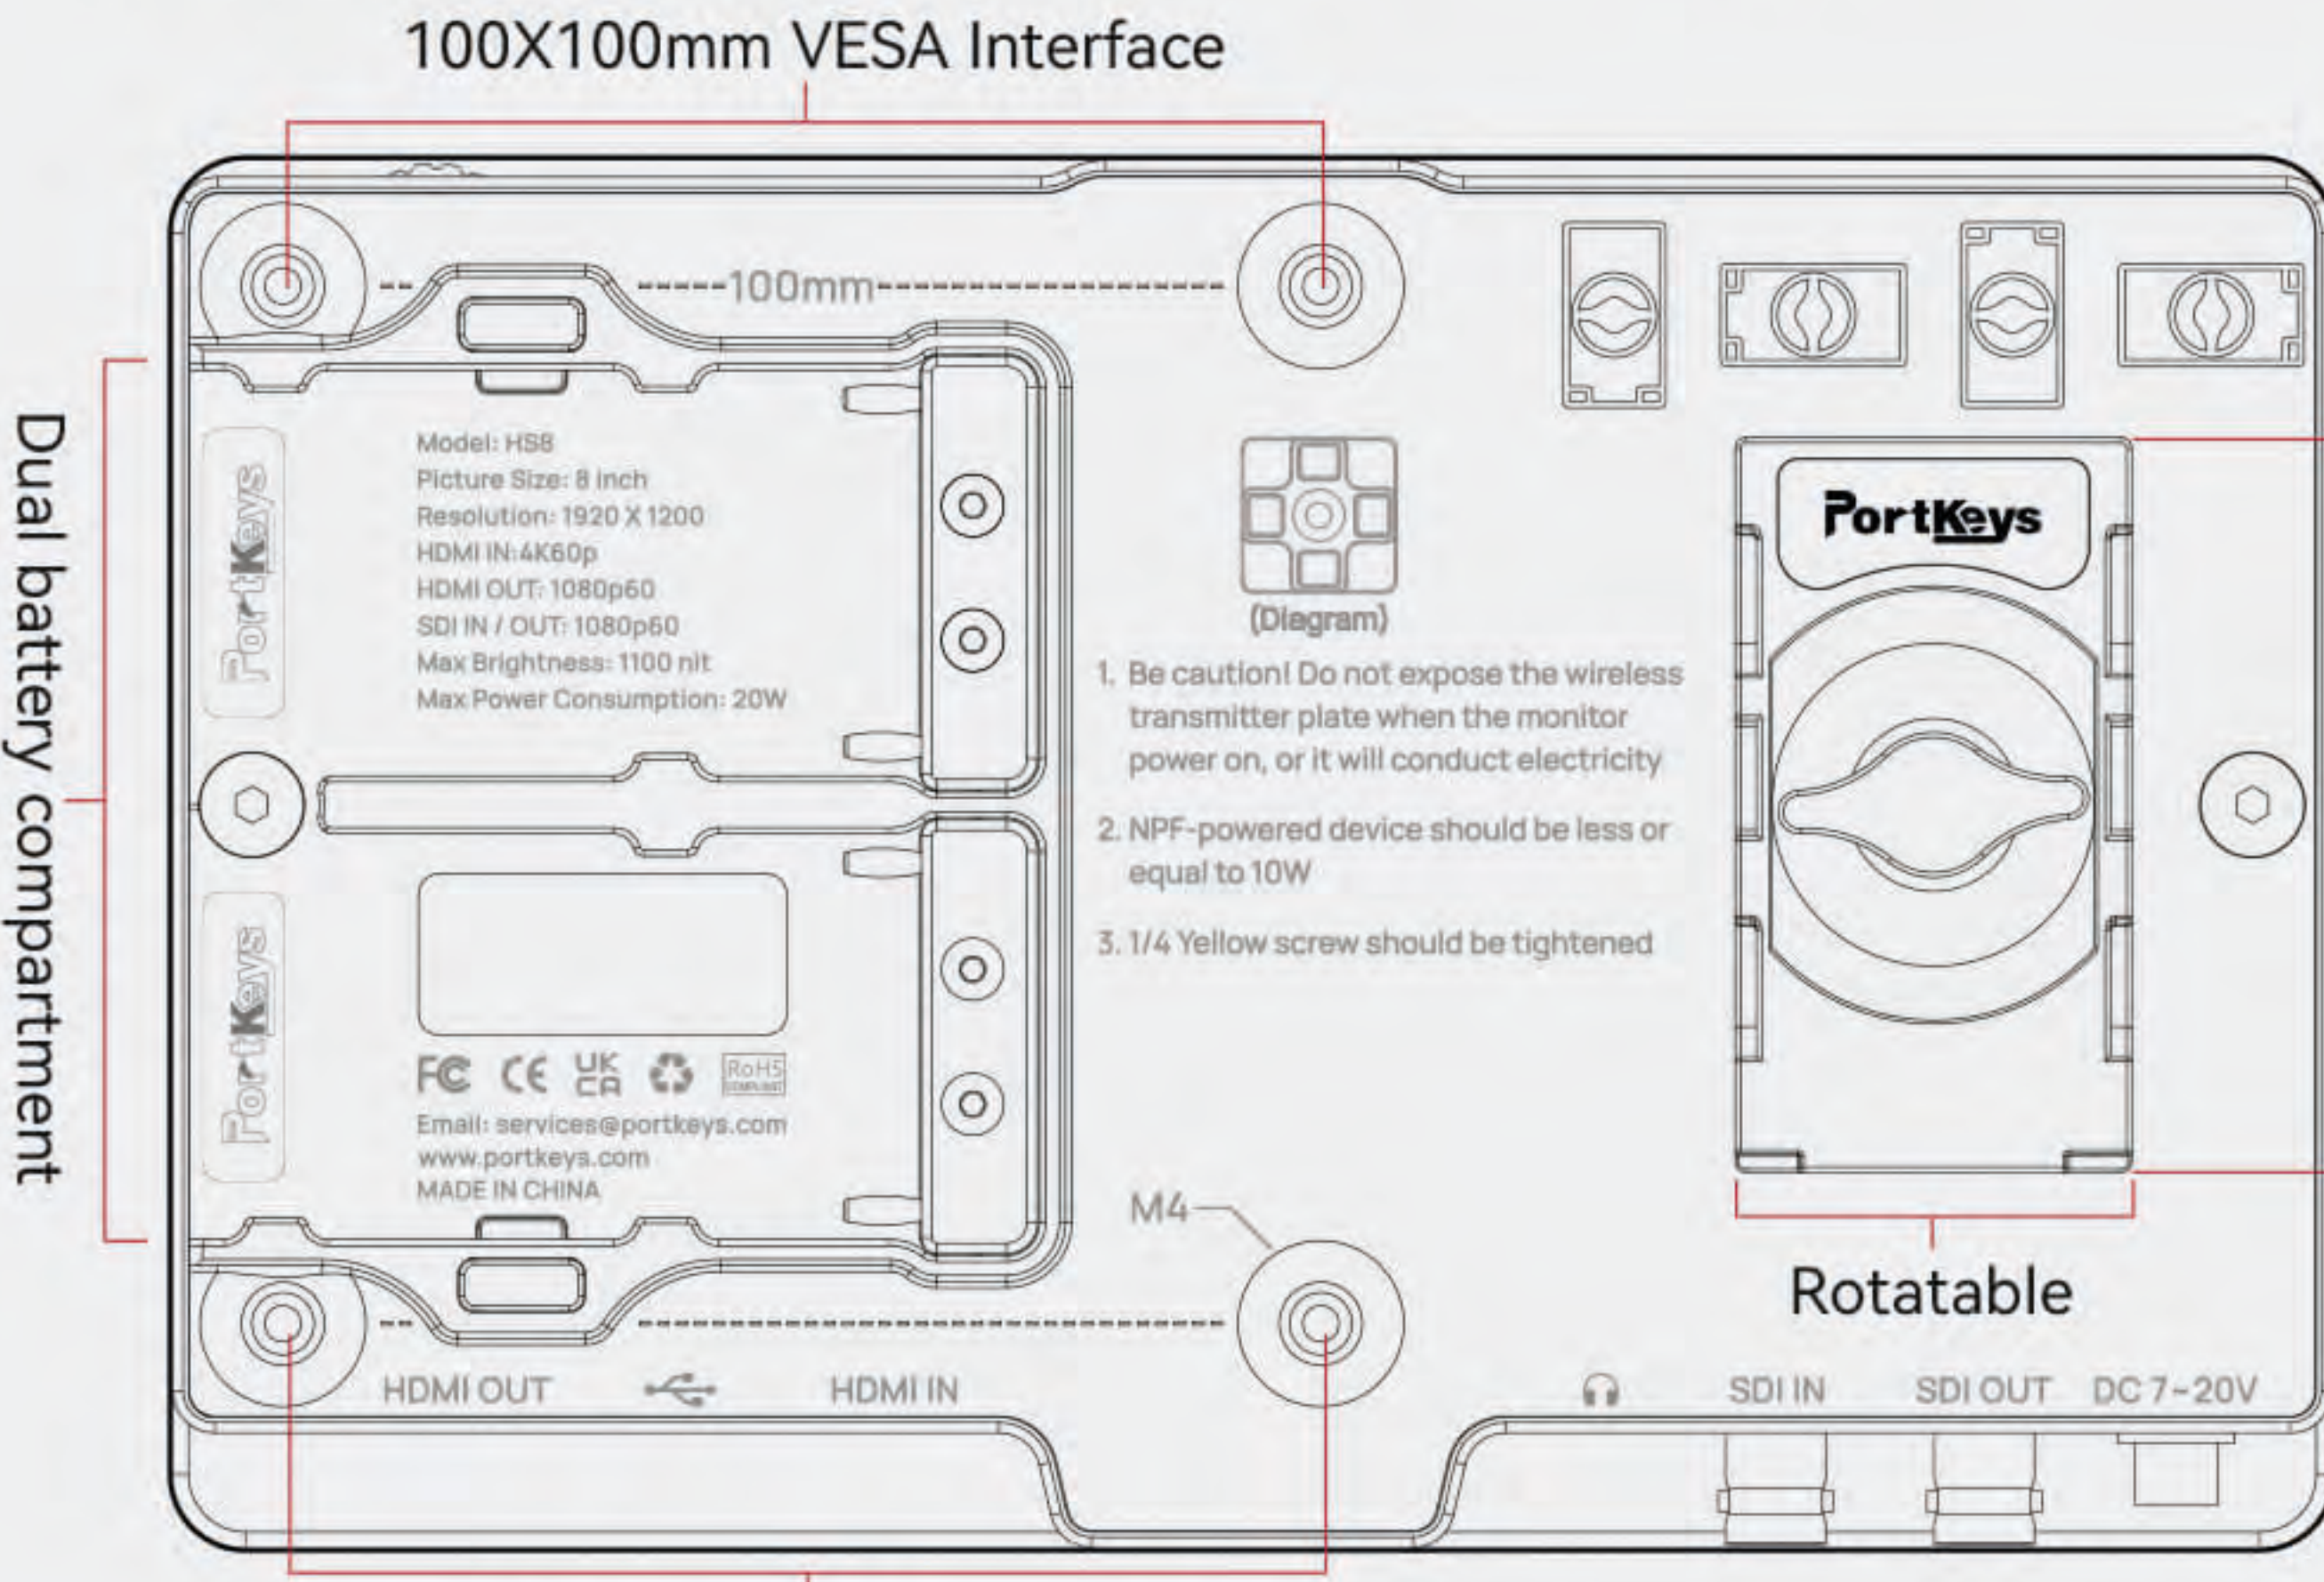

100X100mm VESA Interface