

# Blackmagic Cloud Store Max 24TB



Blackmagic Cloud Store Max 24TB is an extremely high performance flash storage solution in a compact 1RU design. Cloud Store Max features 24TB capacity 12 card RAID 0 flash memory core, 4 x 10G Ethernet, 100G Ethernet, QSFP connection for high speed copper cables or longer optical fiber cables, USB-C and Blackmagic Cloud sync for distributing files globally. It's fast, even with lots of simultaneous users all accessing files at the same time!

7 115 €\*

## Anschlüsse

### 10G-Ethernet-Ports

4 x Ethernet 100/1000/10G BASE-T

### 100G Ethernet Ports

1 x Ethernet 100/1000/10G/100G BASE-T

### USB-C-Port

1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

### SDI-Monitorausgänge


1

### HDMI-Monitorausgänge

1

### Computer-Schnittstelle

USB-C or Ethernet for shared file access, configuration and software updates.

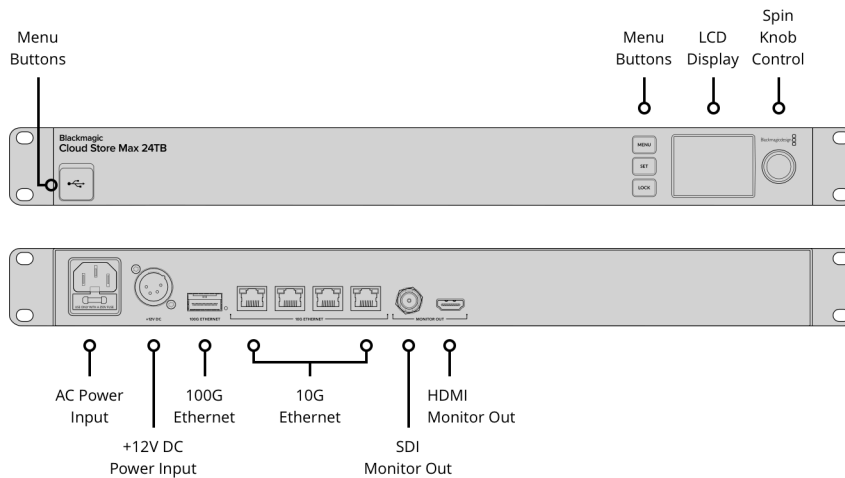

---

## Filesharing-Protokoll

<b>Protocol</b>	<b>Computer Connections</b>
SMB	50 max.

---

## Cloud-Synchronisation

### Kompatible Dienste

Dropbox  
Google Drive

---

## Speicher

<b>Speichertyp</b>	<b>Gesamtkapazität</b>
M.2 NVMe SSD	24TB

---

## Bildschirme

### SDI Monitor Out Standards

1080p/50; 1080p/59,94; 1080p/60

### Normen für die HDMI-

#### Monitorausgabe

1080p/50; 1080p/59,94; 1080p/60

### Anzeige der Monitorausgabe

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

### Front Panel Display

Built in 2.2 inch LCD for settings and storage name, capacity and use.

### Statusanzeigen

Front panel LED illuminates white indicating normal operation or red indicating disk fault.

---

## Steuerung

### Integrierte Frontblende

3 buttons, 2.2 inch color display and spin knob for menu settings.

### Externe Steuerung

USB-C or Ethernet for configuration and software updates.

---

## Software

### Inbegriffene Software

Blackmagic Cloud Setup Utility  
Blackmagic Proxy Generator Lite  
Internal software upgrade via Blackmagic Cloud Setup using USB-C port.

---

---

## Betriebssysteme



Mac 14.3 Sonoma  
oder höher



Windows 10 und 11

---

## Strombedarf

### Stromversorgung

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

### Stromeingänge

1 x IEC C14 mains input.


1 x 4-pin XLR +12V DC input.

### Energieverbrauch

TBA

---

## Physische Spezifikationen

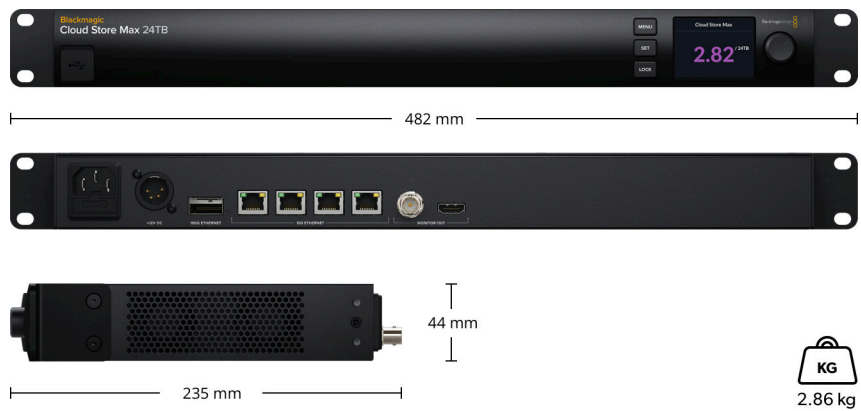

---

## Umgebung

### Betriebstemperatur

0° to 40° C (32° to 104° F)

### Lagerungstemperatur

-20° to 60° C (-4° to 140° F)

### Relative Luftfeuchtigkeit

0% to 90% non-condensing

---

Im Lieferumfang enthalten

Blackmagic Cloud Store Max 24TB  
Startermappe mit QR-Code zum Download der Software

---

Garantie

12 Monate eingeschränkte Herstellergarantie

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2024. Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer. Unverbindliche Preisempfehlungen inkl. MwSt. zzgl. Versand- und Zustellungskosten. Diese Website nutzt Remarketing-Dienste. Besuchern unserer Website werden unsere Inhalte auch auf Fremdanbieter-Websites angezeigt. Sie können sich jederzeit abmelden, indem Sie Ihre Cookie-Einstellungen ändern. [Datenschutzerklärung](#)

Zugelassene Blackmagic Design Reseller