

Blackmagic Media Dock



2 175 €*

Blackmagic Media Dock accelerates your post production workflow by enabling high speed network sharing and upload from up to 3 Blackmagic Media Modules from Blackmagic URSA Cine cameras. 4 x 10G Ethernet ports allow 4 separate edit stations to be connected and edited (?) directly. Blackmagic Media dock also has Ethernet over USB-C, dual AC power inputs for redundancy and an HDMI output for live monitoring of media in real time on a TV or monitor.

Anschlüsse

Schnittstelle

3 x removable and hot-swappable Blackmagic Media Modules.

USB-C-Port

1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

Computer-Schnittstelle



USB-C or Ethernet for shared file access, configuration and software updates.

10G-Ethernet-Ports


4 x 10G BASE-T

HDMI-Monitorausgänge

1

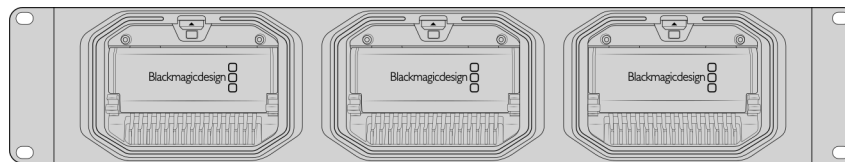

Blackmagic Media Module Bays



Filesharing-Protokoll

Protocol

SMB

Computer Connections

50 max.

Cloud-Synchronisation

Kompatible Dienste

Dropbox
Google Drive

Speicher

Speichertyp

Up to 3 Blackmagic Media Modules.

Externes Speicherformat

Blackmagic (formatted in camera)

Bildschirme

Normen für die HDMI-

Monitorausgabe

1080p/50; 1080p/59,94; 1080p/60

Anzeige der Monitorausgabe

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

Statusanzeigen

LED bezel indicator lights around media module bays.

Gerätesteuerung

Externe Steuerung


USB-C or Ethernet for configuration and software updates.

Software

Inbegriffene Software

Blackmagic Cloud Setup Utility
Blackmagic Proxy Generator Lite
Internal software upgrade via Blackmagic Cloud Setup using USB-C port

Betriebssysteme



Mac 14.3 Sonoma
oder höher



Windows 10, 64-Bit
Windows 11

Strombedarf

Stromversorgung

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.


Energieverbrauch

TBA

Physische Installation

2 rack units.

Physische Spezifikationen

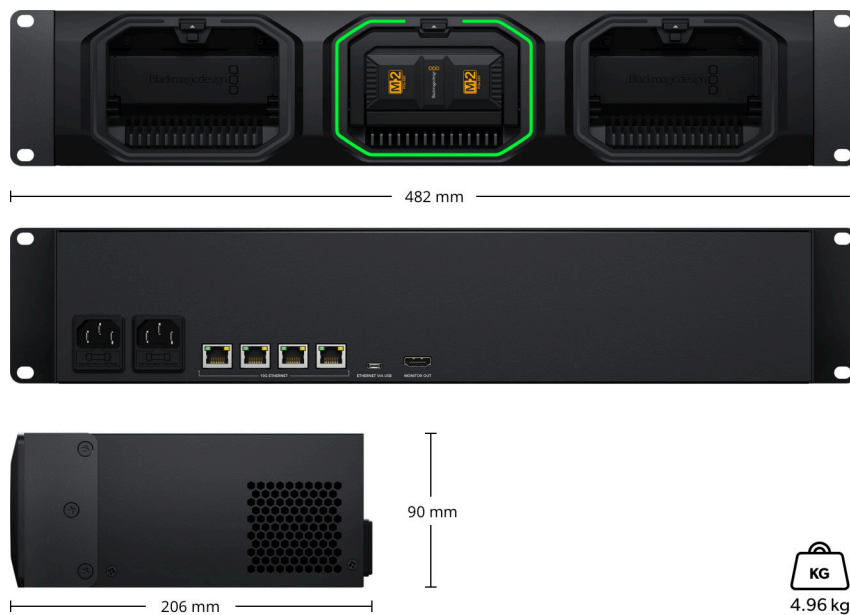

Umgebung

Betriebstemperatur

0° to 40° C (32° to 104° F)

Lagerungstemperatur

-20° to 60° C (-4° to 140° F)

Relative Luftfeuchtigkeit

0% to 90% non-condensing

Im Lieferumfang enthalten

Blackmagic Media Dock

Welcome wallet with QR code for software download

Garantie

12 Month Limited Manufacturer's Warranty.

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2024. Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer. Unverbindliche Preisempfehlungen inkl. MwSt. zzgl. Versand- und Zustellungskosten. Diese Website nutzt Remarketing-Dienste. Besuchern unserer Website werden unsere Inhalte auch auf Fremdanbieter-Websites angezeigt. Sie können sich jederzeit abmelden, indem Sie Ihre Cookie-Einstellungen ändern. [Datenschutzerklärung](#)

Zugelassene Blackmagic Design Reseller